



**ViewSonic** | Workspace

## ViewBoard® IFP105S

Interactive Flat Panel

# Make Space for Collaboration

The ViewBoard IFP105S delivers an expansive interactive experience with its 21:9 aspect ratio, 105" screen, and stunning 5K resolution. Compatible with a full line of accessories, the ViewBoard IFP105S is an ideal solution for meeting rooms, enabling seamless presentations, ideation, and decision-making.

### Ultra-wide, Ultra-high Resolution

Deliver engaging presentations on the 21:9 aspect ratio, 5K resolution, 105" screen.

### Pen-on-paper Writing Experience

Enjoy intuitive collaboration with UFT technology, boasting 40 touchpoints and dual-pen compatibility.

### Crystal Clear Communication

Empower hybrid meetings with the integrated, responsive 8-mic array and speakers.

### Make the Most of Multitasking

Boost productivity with split-screen Picture-by-Picture and floating window Picture-in-Picture multitasking modes.


### Comprehensive Wireless Screen Sharing

Enhance communication with vCast supporting split, extended, and grouped screens on up to 9 devices.

### USB-C One Cable Solution

Benefit from instant multimedia playback, data transfer, and power charging through 2 USB-C ports.

Reseller Information

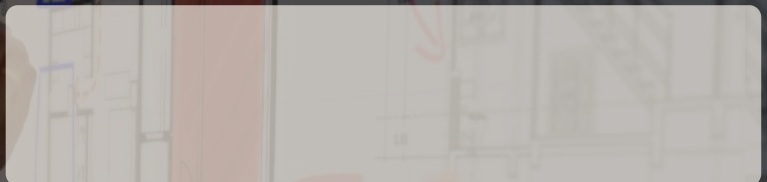

# IFP105S Spec Table

DISPLAY	Panel Size	105"
	Panel Type	TFT LCD Module with DLED Backlight, VA
	Display Area (mm)	2449.92(H) x 1033.56 (V) (104.6"diagonal)
	Aspect Ratio	21:9
	Resolution	WUHD 5120x2160(Pixels)
	Colors	1.07B colors
	Brightness	400 nits (typ.)
	Contrast Ratio	4000:1(Typ.) 5000:1(Min. with DCR enabled)
	Response Time	6.5ms
	Viewing Angles	H = 178, V = 178 (Typ.)
	Backlight Life	50,000 Hours (Min.)
	Surface Treatment	Panel Hard Coating 3H Glass Anti-Glare 7H
	Bezel	19.5/19.5/29.8/41.2
	Orientation	Landscape
PLATFORM	Processor	Octa-Core CPU (A76*4 + A55*4)
	RAM	8GB LPDDR
	Storage	64GB eMMC
TOUCH	Type/ Tech	IR Recognition
	Touch Resolution	32767 x 32767
	Touch Point	Windows: 40 Android: 20
INPUT	HDMI	4 (Rear x3: HDMI 2.0 with CEC; Rearx1: HDMI 2.1 with CEC)
	DisplayPort	1
	Audio	1
	MIC	Built-in 8 Array Microphone
	RS232	1
	OPS	1
OUTPUT	HDMI	1
	Audio	1
	SPDIF	1
LAN	RJ45	2 (inx1; outx1; 1000m for Android/PC; 100m for type-C)
USB	Type A	USB2.0 x 1 (Bottom) (for FW upgrade) USB3.0 x 6 (Top x 2 + Rear x 2 + Front x2 ), all support Smart USB
	Type B	3 (Bottom x 1; Rear x 2)
	Type C	2 [Rearx1: PD65W(65W with OPS, 100W without OPS) + DP1.2 + Data + 10M/100M sharing ; Front x1:PD15W + DP1.2 + Data + 10M/100M sharing]
SPEAKERS	20W x 2 + 20W x 1 subwoofer	
TOP CAMERA PLATE	Yes	
EMBEDDED OS	Android 13	
BUNDLE SOFTWARE	Wireless Presentation	vCast
SPECIAL FEATURES	All-in-one USB port	Yes
	One Click to Cloud Drive	Yes
	Simple LAN sharing between IFP and slot-in Device	(10/100/1000M) (USB Type-C 10/100, Android & PC 10/100/1000)
	Light Sensor	1
POWER	Voltage	100-240VAC +/- 10% Wide Range
	Consumption	On: 275 W(typ.) / Off: <0.5W
ERGONOMICS	Tilt	N/A
	Wall Mount (VESA ) *	1000 x 400
OPERATING CONDITIONS	Temperature (°C)	0°C to 40°C
	Humidity	20% ~ 80% RH non-condensing
DIMENSIONS (W x H x D)	Physical (inch / mm)	98.71 x 44.49 x 4.06 in / 2507.2 x 1130.1 x 103.2mm
	Packaging (inch / mm)	105.04 x 51.38 x 11.02 in / 2668 x 1305 x 280mm
WEIGHT	Net (lb / kg)	201.5lb/91.4Kg
	Gross (lb / kg)	255.1lb/115.7Kg
REGULATIONS	cTUVus,FCC/ICES003 , Energy Star8.0,LBL(low blue light filter), FF(Flicker free), CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE, BSMI	
PACKAGE CONTENTS	01. 3m power cord by ship area 02. Remote control with AAA battery 03. 3m touch USB cable 04. Touch pen x 2 05. Quick Start Guide + Compliance statement 06. RS232 adapter 07. Clamp x 5 08. Camera Plate 09. Screw x 6 (2 for camera , 4 for wall mount) 10. HDMI cable 3m	

