




- Tecnología ViewMode
- Entradas VGA y DVI
- Filtro de luz azul y Flicker-free (sin parpadeo)
- Modo ecologico
- Montaje VESA

El ViewSonic VA2261-2 es un monitor panorámico de 22 "(21.5" visibles) y respetuoso con el medio ambiente que cuenta con la tecnología eye-care Flicker-Free y Blue Light, que eliminan la fatiga visual durante períodos de visualización prolongados. Equipado con una luz de fondo LED y modo Eco, proporciona un ahorro de energía de hasta un 25%*. Con una resolución Full HD de 1920x1080, tiempo de respuesta de 5ms, entradas DVI y VGA y un diseño de acabado brillante con montaje VESA, el VA2261-2 es ideal tanto para el entretenimiento doméstico como para el trabajo de oficina. También tiene la tecnología ViewMode, que incluye modos preestablecidos de texto, película, juegos, mono y web, lo que permite a los usuarios ver una mejor reproducción del color en función de diferentes escenarios de uso.



Full HD 1080p for Superior Pixel Performance

The ViewSonic VA2261-2 features Full HD 1920x1080 resolution for unbelievable pixel-by-pixel image performance. You'll experience the most amazing clarity and detail whether it be while gaming or enjoying the latest in multimedia entertainment. A 16:9 widescreen ratio minimizes eye fatigue even after hours of playtime, and is perfectly compatible with multi-window viewing without toggling.

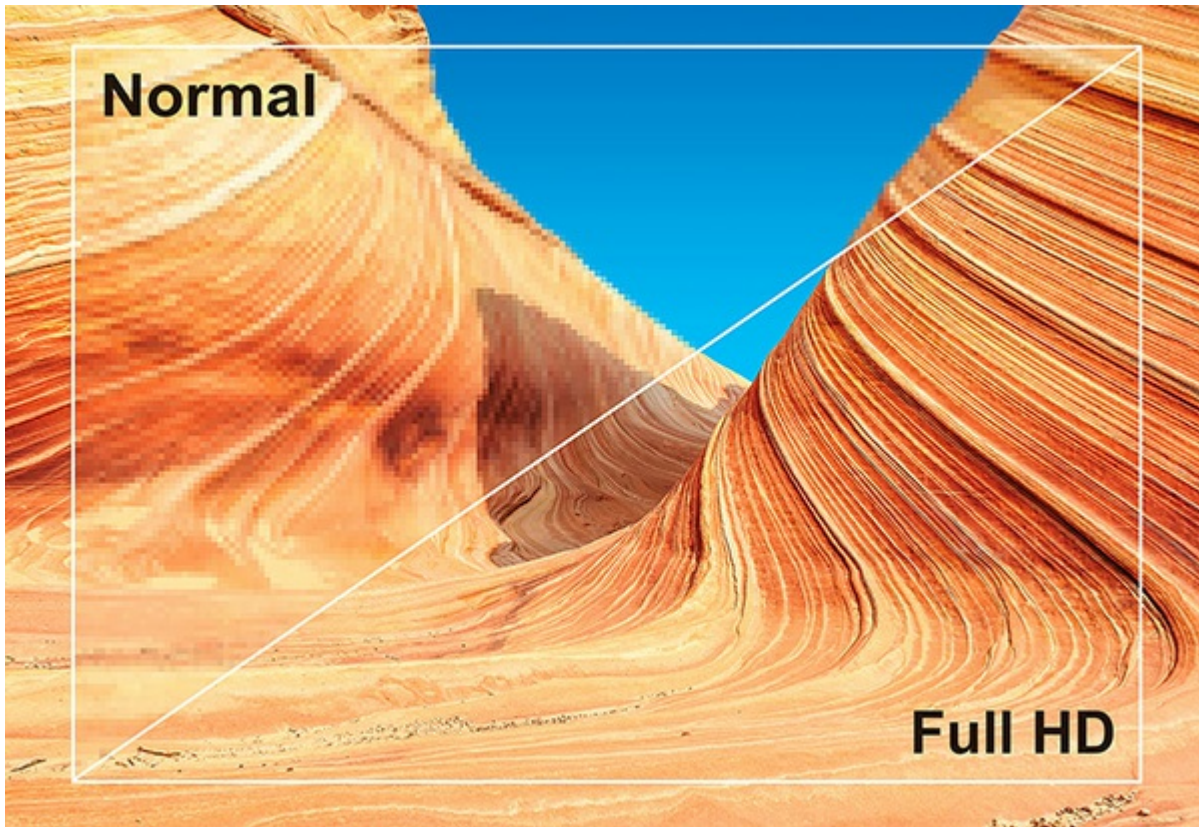

Planet-Friendly Mercury-Free LED Backlighting

LED backlighting enhances display performance, delivers an outstanding color range, and adjusts contrast ratios for remarkably detailed images. ViewSonic's eco-friendly, mercury-free LED backlighting further conserves up to 25%* more energy when compared to conventional displays. In addition, LED backlighting provides for a slim, lightweight profile that saves desktop space.



Eco-mode Conserves More Energy

ViewSonic's proprietary Eco-mode feature is built into all LED displays, offering options to select "Optimize(75%)" or "Conserve (50%)" settings that save up to 25% power. Especially in low ambient light, Eco-mode adjusts brightness and improves visibility, while reducing eye fatigue and prolonging the display's lamp life. With Eco-mode, both lamp replacement and energy expenditures are reduced.

100%

75%



ViewSonic Flicker-Free Viewing for Improved Eye Comfort

ViewSonic flicker-free displays deliver on the promise of more comfortable viewing. Rather than using Pulse Width Modulation that continuously turns the LED backlight on and off, ViewSonic flicker-free displays use DC modulation backlights that maintain a steady stream of direct current power—nearly eliminating screen flickering at all brightness levels by providing a constant LED light source. This lets you work at your computer, play games, or watch movies longer – without eye fatigue.



Blue Light Filter for More Comfortable Viewing

Prolonged exposure to certain levels of blue light can cause eye discomfort. ViewSonic displays feature a Blue Light Filter setting that allows users to adjust the amount of blue light emitted from the screen, enabling longer viewing times and increased eye comfort for work and multimedia applications.



ViewMode Settings for Digital Content


Enjoy excellent performance and accurate color rendering for everything you view on this display. With 5 different scenario presets, ViewSonic displays offer best-in-class calibration techniques to bring you the best digital viewing experience. This includes Game, Movie, Web, Text, and Mono presets to enhance black levels in games and movies, color luster for online images, and color temperature for reading text.



VESA-Mountable

The ViewSonic VA2261-2 features a 75 x 75 mm VESA-mountable design that allows you to mount the display on a monitor stand or on a wall, depending on your specific needs. You can easily unscrew the base, and then mount the display on its new stand or wall mount.



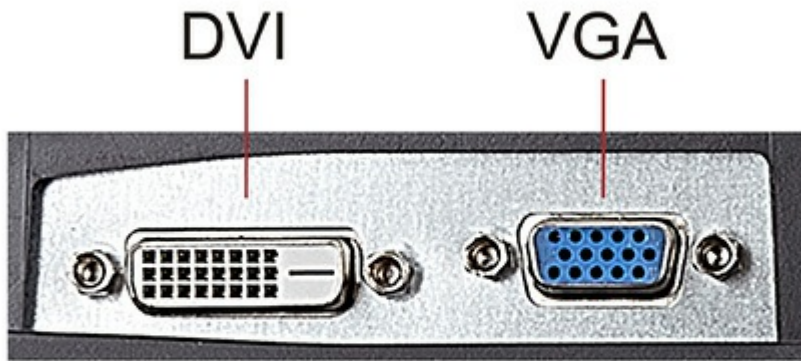

Technical Specifications

LCD	Type	21.5" TFT LED
	Display Area (inch)	476.64 x 268.11 mm
	Optimum Resolution	1920x1080
	Contrast Ratio	600:1
	Relación De Contraste Dinámico	50,000,000:1
	Brightness (nits)	200 cd/m ²
	Viewing Angles	90° / 65°
	Response Time	5 ms (typ)
	Panel Surface	Anti-Glare type, Hardness 3H
	Colors	16.7M
	Backlight	1 WLED light bar
	Backlight Life	30,000 Hrs (Min)
INPUT SIGNAL	Analog	RGB Analog (75 ohms, 0.7 / 1.0 Vp-p)
	Digital	DVI (TMDS, 100 ohms)
	Frequency	Fh = 24 ~82 kHz ; Fv = 50 ~75 Hz
	Sync	Separate Sync
POWER	Voltage	AC 100-240V (Universal); 50/60 Hz
	Typical consumption	22 W (typ)
ERGONOMICS	Tilt	22° ~ -5°
Compatibility	PC	PC Compatibles (VGA up to 1920x1080 Non Interlaced)
	Mac	Power Mac (up to 1920x1080)

Connector

CONNECTOR	Power Video	Internal Power Board , 3-pin plug (CEE22) x1 VGA x1, DVI-D x1
Wall Mount	VESA®	75 x 75 mm
OPERATING CONDITIONS	Humidity Temperature (°C)	10% to 90% (no condensation) 0°C to 40°C
DIMENSIONS (W x H x D) (inch / mm)	Packaging (mm) Physical with stand (mm) Physical without stand (mm)	570 x 390 x 115 mm 504 x 381 x 180 mm 504 x 311 x 48 mm
WEIGHT	Gross (kg) Net with stand (kg) Net without stand (kg)	3.6 kg 2.6 kg 2.2 kg
REGULATIONS	Global	WEEE, RoHS, REACH SVHC List, Windows7, CE and CU
PACKAGE CONTENTS		LCD Display Power Cable Video Cable Quick Start Guide Base Instruction Guide *Actual content may differ from market to market

ViewSonic® Limited Warranty

ViewSonic provides customers with the security of a manufacturer's warranty against defected products. The type and duration of the applicable warranty service varies by product type, country of purchase and can also vary on an individual basis according to customer requirements agreed at time of purchase. The warranty will expire after the end of the warranty period.

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.