

All-in-One Smart Whiteboard Design, Ideal for the Classroom or Boardroom



CDE6552-TL



The ViewSonic CDE6552-TL is an ideal large format interactive solution for classrooms and meeting room. The multiple touch allows two users to simultaneously write or draw on the board with their fingers or styli. A Full HD LED screen guarantees crisp and vivid content. Visually attractive. Create a more interactive learning and meeting environment with this ViewSonic 65" ViewBoard !

Multiple-Touch Capable Interactive Display

ViewSonic large-format interactive touch displays provide up to 4-point (55" model) and up to 6-point (65", 70", and 84" model) simultaneous touch capability - making it perfect for educational and corporate meeting applications. This feature allows 2 or 3 people to simultaneously write on the display's surface using their fingers or styli.




Protective Rounded-Corner Design

Providing a safer learning environment for active students is also an important consideration. That's why ViewSonic large-format interactive touch displays utilize a rounded-corner design to help prevent injuries in the classroom.



Tough Anti-Scratch, Anti-Glare Cover

ViewSonic large-format touch displays are made even more durable by a layer of 7H-hardness tempered glass coupled with an anti-glare film. This material combination provides anti-scratch benefits, while improving screen visibility in bright environments.

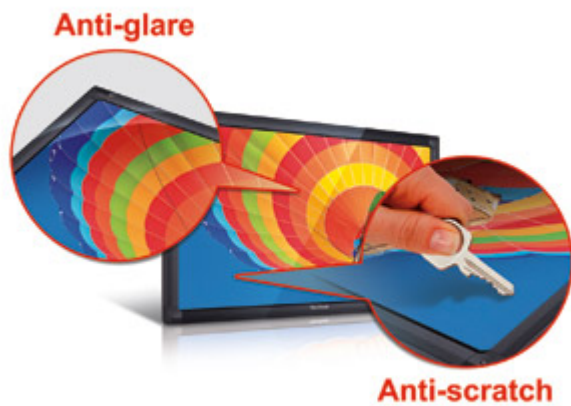

Optional Smart Whiteboard Functionality

With the optional slot-in PC, the ViewSonic large-format touch display can be quickly transformed into a Smart Whiteboard (SWB). Its pre-installed ViewBoard software features handwriting, keyword highlighting and meeting notification applications, and allow for cloud server access to teaching and meeting resources via Internet connection.



Technical Specifications

LCD	Ratio de contraste	4,000:1
	Resolución nativa	1920 x 1080p
	Tamaño	64.53" diagonal
	Brillo	400 cd/m ²
	Retroiluminación	E-LED
	Display Orientation	Landscape
	Service Life	> 30,000 hours
Alimentación	Voltaje	100V-240V AC 50/60HZ
	Power Off Mode	< 0.5W (typ)
	Power On Mode	< 150W (typ)
	Power-Saving Mode (stand-by)	< 0.5W (typ)
MECHANICAL	Bezel Width (T/B/L/R)	55mm
	Gross Dimensions (W x H x D)	1650 x 1067 x 253mm
	Net Dimensions (W x H x D)	1544 x 937 x 95mm
	Speaker Output	15W x 2

VESA Mount	400 x 400 (M8)
Gross Weight	75 kg
Net Weight	66 kg

ACCESSORIES

Moving display mounting cart with wall-mount bracket

REMOTE CONTROL UNIT (RCN)

Control	RS232 In
OPS or PC slot	PC Slot
Other	USB x 1, B type USB x 1 (for Touch), SPDIF Out x 1
Video Output	CVBS
Video/Audio Input	HDMI x 2, VGA x 2, PC audio x 2, S-video x 1, YPbPr x 1, CVBS x 1

TOUCH

Tempered Glass	7H, AG coding
Touch Connection	USB
Touch Resolution	4096 x 4096
Touch Type	Infrared

ViewSonic® Limited Warranty

ViewSonic provides customers with the security of a manufacturers warranty against defected products. The type and duration of the applicable warranty service varies by product type, country of purchase and can also vary on an individual basis according to customer requirements agreed at time of purchase. The warranty will expire after the end of the warranty period.

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.