


SC-T35

SC-T35 Thin Client: VDI Computing with Ultra-Small 0.6L Form Factor

Education and Small- Medium- Enterprises

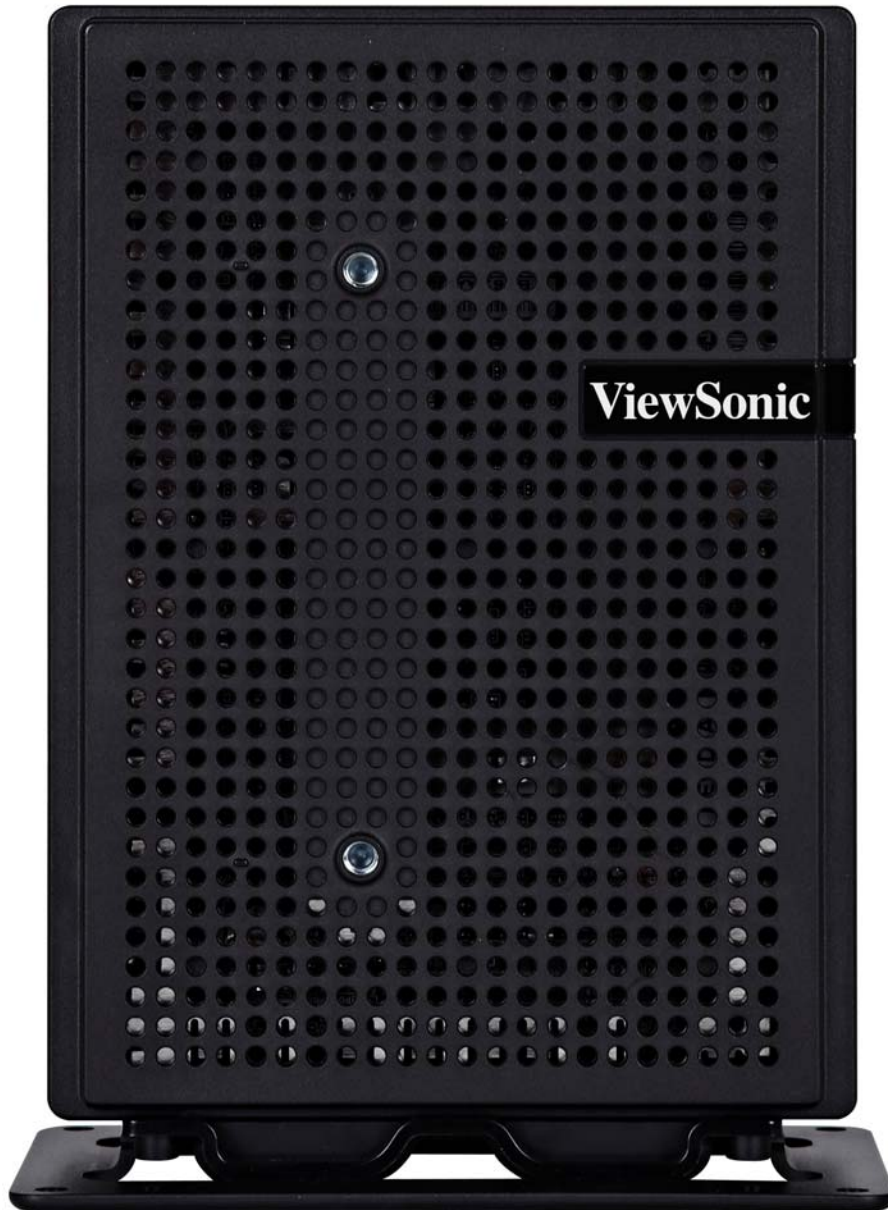

Overview

The ViewSonic® SC-T35 Thin Client is perfect for businesses looking for cost-effective and flexible solutions for their virtual desktop computing needs. Equipped with Texas Instruments DM8148 CPU and ARM Linux OS, the SC-T35 is optimised for all of the major remote networking protocols including Citrix® ICA/HDX, software

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.



accelerated PCoIP™ and Microsoft® RemoteFX™—making it a versatile virtualization solution with endless possibilities. With a slim and compact design, the SC-T35 easily attaches to your VESA ready monitor with the included VESA mounting bracket, and also provides dual digital outputs for driving dual 1080p displays. In addition to saving space, the SC-T35 also saves on energy with an eco-friendly design that consumes just 8W of power and uses up to 90% less energy than standard PCs. ViewSonic's Thin Clients are the smart choice for optimizing your virtual desktop deployment.

Low Total Cost of Ownership



From the low initial expenditure cost, to the long-life solid state design, and the ultra low 8-watt typical power consumption, the SC-T35 is the definition of efficiency.

Flexible Design

Future-proof your network with this flexible thin client and rest assure that you will be supported even if your virtualization needs change later. This is the go-to thin client for mainstream VDI applications.

Powerful Computing Combination



Texas Instruments DM8148 ARM and ARM Linux Operating System provide the power and flexibility to support multiple network protocols including Citrix ICA/HDX, PCoIP for VMware®, and Microsoft RDP with RemoteFX.

Easy Deployment and Management

Deploy users up to 5 times faster than traditional PC-based clients, and enjoy ongoing simplified management without the need for constant patches and system updates.

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.





Technical Specifications

CONNECTOR	Power	DC In
	Video Output	DVI-D (x1), DVI-I (x1)
	USB	USB 2.0 (x2 front, x2 rear)
	Headphone	3.5mm mini jack (x1)
	LAN	RJ45 (x1)
	Microphone in	3.5mm mini jack (x1)
POWER	Voltage	5V DC; 3A, 15W
	Consumption	8W (typ)
MEMORY	System	DDR3 1GB @ 800MHz
	Storage	512MB Flash

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.

ViewSonic®
See the difference™ 

OPERATING CONDITIONS	Temperature	32-104°F (0-40°C)
	Humidity	10-90% (non-condensing)
DIMENSIONS	Physical With Stand	1.6 x 5.6 x 4.1 in. / 39.5 x 143 x 103 mm
	Packaging	7.9 x 5.0 x 6.2 in. / 200 x 128 x 157 mm
WEIGHT	Net	1.0 lb. / 0.5 kg
	Gross	2.2 lb. / 1.0 kg
REGULATIONS	FCC, ENERGY STAR®, EPEAT Silver, WEEE, RoHS, REACH	
PACKAGE CONTENTS	SC-T35 Thin Client, power cord, power adapter, DVI-I to VGA adapter, Stand/VESA mounting bracket, Quick Start Guide, ViewSonic Wizard CD **Actual content may differ from market to market	
VESA® MOUNT	100mm x 100mm	
CORE	CPU	TI DM8148 ARM
	CPU Processor Speed	1.0 GHz
SOFTWARE	OS	Linux
	Protocols	Citrix ICA/HDX 12.2.3 VMware View 5.01 Microsoft RDP7.1 with RemoteFX
	Management	ViewSonic Device Manager / ViewSonic Client Setup
	Network Standard	Gigabit Ethernet, DHCP, SSL, PPPoE, Wake on LAN
COMMUNICATION	Ethernet LAN	10/100/1000 MB
	Wireless LAN	802.11 b/g/n with optional wireless USB adapter (WPD-100)
GRAPHICS	Chipset	None
	Resolution	1920 x 1200 (single display)
WARRANTY	3-year limited warranty on parts and labour **Warranty offered may differ from market to market	
RECYCLE/DISPOSAL	Please dispose of in accordance with local, state or federal laws	
COUNTRY OF ORIGIN	Taiwan	

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.



ViewSonic® Limited Warranty

ViewSonic provides customers with the security of a manufacturers warranty against defected products. The type and duration of the applicable warranty service varies by product type, country of purchase and can also vary on an individual basis according to customer requirements agreed at time of purchase. The warranty will expire after the end of the warranty period.

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.

