


VX2210mh-LED

22" LED Multimedia Display

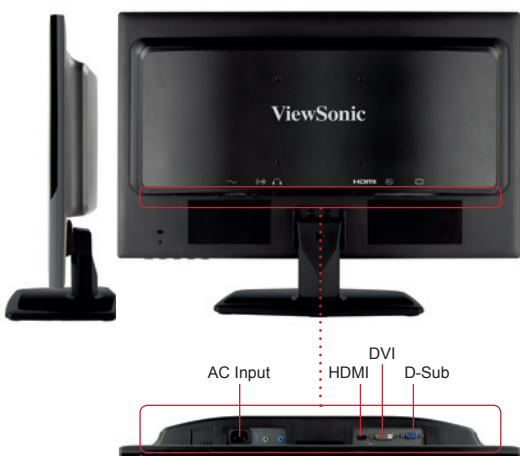

ViewSonic's 22" VX2210mh-LED display features eco-friendly LED backlighting and power-saving modes for a green viewing experience. It's equipped with our exclusive ClearMotiv® II video technology that enables vivid, smooth images without distortion or blur. The display automatically adjusts brightness levels and maximizes the greyscale and colour range to achieve an extreme 20,000,000:1 dynamic contrast ratio! Its Full HD 1080p video resolution and 16:9 aspect ratio deliver an exciting, widescreen viewing experience. And with a slim profile, the VX2210mh-LED saves space on your desk.

- > **Full HD 1080p resolution**
1920 x 1080 Full HD video resolution enables premium viewing quality through a 16:9 screen. Enjoy spectacular widescreen presentations with vivid, clear images in your home or office.
- > **LED backlight**
LED backlights enhance display performance by delivering an outstanding colour gamut and contrast ratio to create remarkably refined images. LEDs also provide energy savings and slimmer displays for a new entertainment experience.
- > **ClearMotiv® II 5ms video response**
Innovative ClearMotiv® II imaging technology enables an ultrafast 5ms liquid crystal response time. Experience digital broadcast-quality, full-motion video with sharp images that never blur.
- > **Superb 20,000,000:1 dynamic contrast ratio**
Dynamic contrast ratio automatically detects the brightness of an image and adjusts the LED backlight in response. It maximizes the greyscale and colour range and boosts contrast ratio to an ultrahigh 20,000,000:1, resulting in rich, vibrant visuals.
- > **Energy savings with ECO Mode**
ECO Mode reduces power consumption up to 40%. Select the Optimize (75%) or Conserve (60%) options to reduce display brightness, save money and help the environment. Adjusting the brightness will improve visibility and reduce eye fatigue, especially under low ambient light conditions.


Special Features

ClearMotiv® II imaging technology for 5ms video response



ViewSonic's innovative ClearMotiv® II imaging technology enables an ultrafast liquid crystal response time. Experience digital broadcast-quality, full-motion video with sharp images that never blur.

20,000,000:1 Dynamic Contrast Ratio

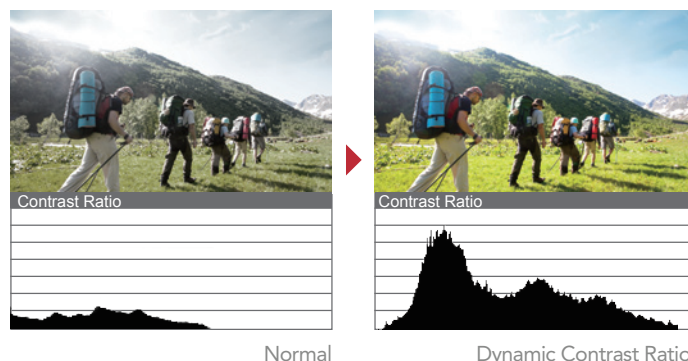

Dynamic contrast ratio detects the brightness and darkness of an image and automatically adjusts the backlight to maximize the monitor's colour range and contrast ratio. Dynamic contrast ratio technology enables the accurate reproduction of images, producing vibrant, rich visual effects.

For more product information, visit us at www.viewsoniceurope.com



VX2210mh-LED

22" LED Multimedia Display



| | | |
|--------------------------|---|--|
| LCD PANEL | Display Area | 55 cm (21.5") Wide |
| | Optimum Resolution | 1920 x 1080 |
| | Brightness | 250 cd / m ² |
| | Contrast Ratio | 1,000 : 1 (typ.) |
| | Dynamic Contrast Ratio | 20,000,000 : 1 |
| | Viewing Angles | 170° / 160° (typ.) |
| | Response Time | 5 ms |
| | Pixel Arrange | 0.248 mm x 0.248 mm |
| | Panel Surface | Anti-Glare type, Hardness (3H) |
| | Backlight | White-light LED |
| Backlight Life | 40,000 Hrs (Min.) | |
| INPUT | Analog | RGB Analog (75 ohms, 0.7 / 1.0 Vp-p) |
| | Sync | Separate Sync |
| | Frequency | Fh = 24 ~ 82 kHz ; Fv = 50 ~ 75 Hz |
| COMPATIBILITY | Digital | DVI (TMDS, 100 ohms) / HDMI 1.4 |
| | PC | VGA up to 1920 x 1080 (Non Interlaced) |
| CONNECTOR | MAC | Power MAC (up to 1920 x 1080) |
| | Analog | 15-pin Mini D-sub *1 |
| ERGONOMICS | Digital | DVI- D *1 / HDMI *1 |
| | Audio | Mini Phone Jack Audio In *1 / Audio Out *1 |
| | Power | Internal Power Board , 3-pin Plug (CEE22) *1 |
| AUDIO | Tilt | 15° ~ -5° |
| POWER | Speaker | 2W x 2 |
| | Voltage | AC 100 - 240V (Universal); 50 / 60 Hz |
| OPERATING CONDITIONS | Consumption | 19W (typical) |
| | Temperature | 32° F to 104° F (0° C to 40° C) |
| DIMENSION WITH STAND | Humidity | 5% to 90% (No Condensation) |
| | mm (W x H x D) | 511.46 x 371.25 x 163.86 |
| DIMENSIONS WITHOUT STAND | inch (W x H x D) | 20.13" x 14.61" x 6.45" (inch) |
| | mm (W x H x D) | 511.46 x 310.44 x 61.95 |
| WEIGHT | inch (W x H x D) | 20.13" x 12.22" x 2.44" |
| | With Stand | 3.54 Kg (7.80 lbs) |
| REGULATIONS | Without Stand | 3.23 Kg (7.12 lbs) |
| | CB, CE, GOST-R, Energy Star, | |
| | UkrSEPRO ErP, REACH SVHC List | |
| VESA® MOUNT | WEEE, RoHS, Windows XP / Vista premium, | |
| | Window7, CCC, CEL Level 1 | |
| | | 100mm x 100mm |

* Specifications subject to change without notice



For more product information, visit us at www.viewsoniceurope.com

ViewSonic
See the difference™