

10" (10.1" viewable) All-in-one touch digital ePoster



EP1042T



- Résolution HD 800p
- Multi-touch 10 points
- Lecteur multimédia intégré pour la lecture de vidéos, de photos et de musique
- Mémoire interne de 8 Go et haut-parleurs intégrés
- Deux haut-parleurs intégrés

The ViewSonic EP1042T is a 10" (10.1" viewable) all-in-one interactive digital ePoster designed as a conference and meeting arrangement solution, delivering eye-catching and touch-interactive commercial messaging. Adopting the latest power-over-Ethernet (POE) technology, the display can be easily installed at high-visibility locations via one LAN cable. The EP1042T features a wireless b/g/n network and LAN connectivity for easy content loading. Multi-touch compatibility with HTML5 and SMIL formats deliver a 2-way interactive platform for dynamic, customized content. Its built-in media player, 8GB internal storage, and integrated speakers enable the playback of video clips, as well as photos and music, from a USB hard drive or SD/SDHC memory card. Bundled with Signage Manager Express software, the EP1042T effectively delivers customized messaging to target audiences. With VESA-mount compliance (75mm x 75mm), the EP1042T is installation-ready for high-visibility, high-traffic locations.

Convenient one-wire installation via Power over Ethernet

The display utilizes state-of-the-art Power over Ethernet (PoE) technology for one-wire installation. This allows you to easily power and connect your displays with just a single cable. PoE also allows you to create

multi-display digital signage installations, while reducing installation costs.



Interactive on-demand messaging for your customers

The display delivers on-demand advertising and messaging while increasing two-way communication with customers. With 10-Point multi-touch capability, it creates more content engagement with the walk-by passengers in high-traffic venues.




Integrated USB Multimedia Player

This display features an integrated media player with a convenient USB playback function. Now photos, music, and 1080p video can be quickly displayed on-screen directly from a USB drive – without the need for a PC.



Support for dynamic W3C/SMIL-format presentations

With the bundled Signage Manager Express software, the display can display W3C HTML5 and SMIL content retrieved from the Internet. This content management and scheduling system offers the flexibility to display fresh and interesting content such as news, weather information, stock market trends, sports scores, social networking, or RSS feeds on multiple screens.

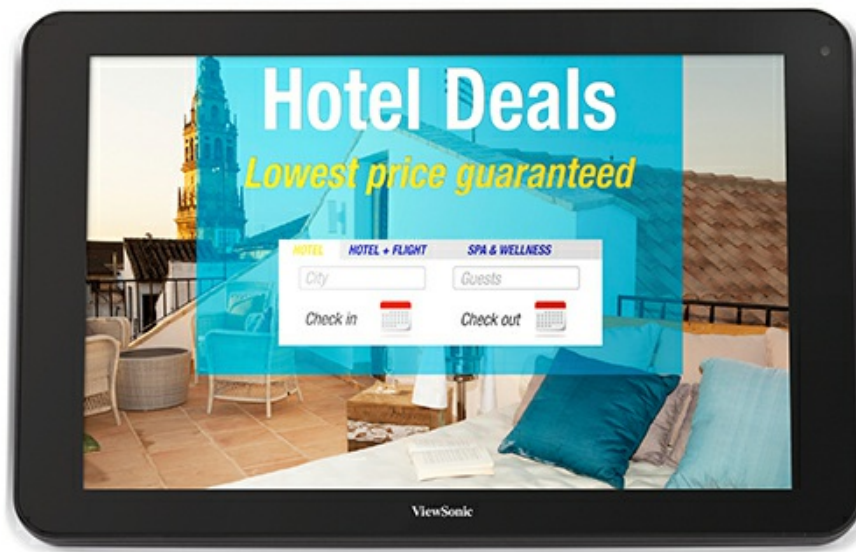

Easy loading of content through Wireless/ RJ45 Ethernet

The display integrates wireless 802.11 b/g/n network and RJ45 Ethernet connectivity, providing a convenient and efficient way to load content from a PC or laptop connection. Wireless/LAN connectivity can also be used to remotely load content to multiple displays.



8GB of internal memory and SD/SDHC card slot

The display is capable of storing and playing hours and hours of high-definition multimedia content thanks to its 8GB of built-in, shock-resistant, solid-state memory. This reliable all-in-one e-poster will display dynamic content with no crashes, freezes or lost content.



Dual Integrated Speakers

Designed with dual integrated speakers, this display combines incredible screen performance with stereo sound for an immersive multimedia experience.



Caractéristiques Techniques

SPECIFICATION	Panel Size	10" (10.1" diagonal)
	Type/ Tech	TFT LCD Module with LED Backlight
	Display Area (mm)	216.96(W) x 135.6(H)
	Aspect Ratio	16:10
	Resolution	1280 x 800
	Colors	262K Color
	Brightness	300 nits (typ.)
	Contrast Ratio	800:1 (typ.)
	Response Time	25 ms
	Viewing Angles	Top = 85, Bottom = 85, Left = 85, Right = 85 (typ.)
	Backlight	LED
	Backlight Life	10,000 Hours (typ.)

TOUCH	Type/ Tech	Capacitive
	Touch Resolution	1280x800
	Touch Point	10 point for gesture

INPUT	Audio	x1 (3.5mm jack)
	SD/SDHC	Micro SD (Up to 32GB)

LAN

	RJ45	x1 (10M/100M BASE-T, PoE 13W)
USB	Type A	x2 (USB2.0)
	Micro USB	x1
CAMERA		2M Pixel
SPEAKERS		2W x2
BUILT IN PLAYER	OS	Android 4.4
	Processor	Rockchip RK3188
	Storage	1GB DDR3-1600 SDRAM
	Graphic	ARM Mali400 MP4
	Storage	8GB
	HDMI (1080p)	Up to 1080p @ 50/60Hz
POWER	Voltage	100-240VAC +/- 10% Wide Range
	Consumption	13.5W (Max)
ERGONOMICS	Tilt	N/A
	Wall Mount (VESA®)	75 x 75mm
OPERATING CONDITIONS	Temperature (° C)	32°F to 104°F (0°C to 40°C)
	Humidity	30% ~ 80% non-condensing
DIMENSIONS (W x H x D)	Physical (inch / mm)	269.88 x 170 x 28.5 mm / 10.62 x 6.69 x 1.12 in.
	Packaging (inch / mm)	336 x 100 x 227 mm / 13.2 x 3.93 x 8.93 in.
WEIGHT	Net (lb / kg)	0.727 kgs / 1.6 lbs
	Gross (lb / kg)	2.245 kgs / 4.95 lbs
REGULATIONS	Standard	FCC, cTUVus, Mexico COC, ICES-003
What's in the box?		<ol style="list-style-type: none"> 1. AC Adapter 2. Power plug x 1 (US/EU/AU/UK) 3. Power and Micro SD card brackets 4. Display stand 5. Hardware Quick Start Guide 6. Software Quick Start Guide 7. Documentation CD (UG, QSG, Signage Manager software)
		*Actual content may differ from market to market

Pour en savoir plus, rendez-vous sur : www.viewsoniceurope.com

Tous droits réservés par Copyright ViewSonic Corporation. Tous autres noms de sociétés et marques sont propriété de leurs sociétés respectives. E&EO. Les caractéristiques techniques et prix susceptibles de modifications sans préavis. Les images peuvent être utilisées seulement à des fins d'illustration. Pour en savoir plus consulter nos dispositions légales.