


PJD5353

SHORT THROW PORTABLE XGA PROJECTOR

ViewSonic's PJD5353 short throw DLP projector is ideal for use in the office or on campus. It delivers amazingly clear images with 2500 ANSI lumens, 3000:1 contrast ratio and XGA 1024 x 768 native resolution. With a short throw lens, it offers large images from short distances – project a 60" image from only 0.8 metres away. The projector is packed with features like multiple PC and video inputs, HDMI for HD video signals, 120Hz/3D-ready for 3D applications and integrated speaker for multimedia. With ViewMatch™ technology adjusts colour perfectly, so your presentations will be rich and vibrant regardless of any setting. This projector weighs only 2.6 Kg and is equipped with energy-saving Eco-mode which lowers power consumption and extends lamp life up to 6000 hours. The PJD5353 short throw XGA DLP projector delivers excellent performance and value for small business and education applications.

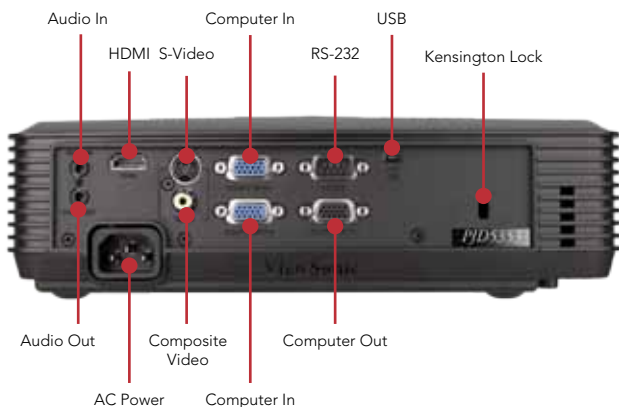

- > **Short throw lens for large, stunning images in small places**
The short throw lens enables large images to be projected from short distances in small rooms with space limitations. No distracting shadows on the projected image and no blinding lights in front of the presenters. A screen size of 60-inch is possible from just 0.8 metres away.
- > **BrilliantColor™ technology**
Latest BrilliantColor technology delivers stunning all-digital clarity with life-like colour, sharp graphics and outstanding video. The sophisticated 6-segment colour wheel enhances the yellow colour performance that is key to accurate and vivid colour reproduction.
- > **HDMI True digital connectivity**
HDMI is the highest and future-proof video standard, guaranteed for true digital picture clarity.
- > **Long Lamp Life 6000 hours**
The new advanced lamp technology extends the lamp life up to 6000 hours* and saves on maintenance costs.
- > **3D-Ready Powered by DLP® Link™ Technology**
Supports up to 120Hz frame rate.
- > **Give Greener Presentations & Save**
Use energy-saving Eco-mode to lower power consumption, extend lamp life and reduce noise. Filter-less design for saving maintenance costs and labour.
- > **New slim design**
With only 3.2 inch height and lightweight of 5.7 lbs, it's designed for portability and is easy to move from location to location.



PJD5353

SHORT THROW PORTABLE XGA PROJECTOR



Optional Accessories

Replacement Lamp	RLC-072
Soft Case	PJ-CASE-001
3D HD Video Processor	VP3D1
3D Active Shutter Glasses	PGD-250
Wireless Presentation Gateway	WPG-360

DISPLAY	Type	0.55" Digital Micromirror Device (DLP®)
	Resolution	XGA 1024x768 (Native)
	Lens	Fixed Manual optical zoom / Manual optical focus
	Keystone	Vertical digital keystone correction: +/- 40 degrees
	Size	40" - 300" / 1.0m - 7.6m
	Throw Distance	1.6ft - 14.0ft / 0.5m - 4.3m
	Throw Ratio	0.68:1
	Lamp	180 watt
	Lamp Life (Normal / Eco Mode)	5000 / 6000* hours
	Brightness	2500 Lumens
Contrast Ratio	3000:1 (dynamic)	
Aspect Ratio	4.3 (native), 16:9, auto	
AUDIO	Speakers	2W
	INPUT SIGNAL	Computer and Video
COMPATIBILITY	PC	VGA to UXGA
	Mac	Up to UXGA (scaled)
CONNECTOR	RGB Input / Output	2 x 15-pin mini D-sub / 1 x 15-pin mini D-sub
	Component	2 x 15-pin mini D-sub (shared with RGB)
	Composite Input	1 x RCA jack
	S-Video Input	1 x 4-pin mini-DIN
	Audio Input / Output	1 x 3.5mm mini jack / 1 x 3.5mm mini jack
	Control	1 x RS-232 (8 Pin mini-DIN)
	POWER	Voltage
CONTROLS	Consumption	235W (typ) / <1W (stand-by mode)
	Basic	Power, keystone/arrow keys, left/source, menu/exit, right/mode
OPERATING CONDITION	OSD	Picture: Color Mode, Brightest PC, ViewMatch, Movie, User 1, User 2, White board, Black board, Green board, Brightness, Contrast, Color setting, User color, White intensity, Gamma, Aspect Ratio, Keystone, 3D sync, 3D invert Video / Audio: Frequency, Tracking, H & V position, Zoom, Video setting, Audio setting Setting (Basic): Projector Projection, Menu Setting, Signal Type, Blank Screen, Test Pattern, Start up screen, Message, Auto source, Power saving, Green mode Option (Advanced): Closed Caption, DCR, Password, Presentation Timer, High Altitude, Lamp setting, Factory Default Information: Current System Status, Input Source, Resolution, H & V Frequency, Lamp hours
	Temperature	0°C - 40°C (32°F - 104°F)
	Humidity	10%-80% (non-condensing)
NOISE LEVEL	Altitude	0~6,000 ft (1,800m), operational up to 10,000 ft (3048m)
		32 (Normal) / 30 (Eco-mode)
DIMENSIONS	Physical	294 x 82 x 234 (mm) (W x H x D)
WEIGHT	Net	2.6 kg (5.7 lb)
REGULATIONS		RoHS,CB, CCC, PSB, C-tick, KC, SASO, CE, GOST-R, Ukr, Erp, SVHC list & REACH DoC, UL, FCC(including ICES-003), cUL/ CSA, Argen, NOM
PACKAGE CONTENTS		ViewSonic PJD5353 projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



ViewSonic Corporation's OMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by the British Standards Institution.

Projection Distance 4:3 Screen		Screen Size 4:3 Screen	
m	feet	m	Inch
0.6	1.8	1.0	40
0.7	2.3	1.3	50
0.8	2.7	1.5	60
1.0	3.2	1.8	70
1.1	3.6	2.0	80
1.3	4.1	2.3	90
1.4	4.5	2.54	100

*Running eco-mode exclusively can extend lamp life. DLP® and the DLP logo are registered trademarks of Texas Instruments and BrilliantColor™ is a trademark of Texas Instruments. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2011 ViewSonic Corporation. All rights reserved. [VSE19/10/2011] PJD5353