



Overview

The ViewSonic 69.5" CDE7051-TL is the ideal interactive display solution for in-classroom teaching, online training sessions, video conferencing and more. The 6-point touch-enabled display allows two users to simultaneously write or draw on the board using their fingers or stylus. A Full HD LED screen guarantees crisp and vivid image quality, and with 350-nit brightness the CDE7051-TL provides better visual performance in well-lit rooms. Visually attractive, the CDE7051-TL has an ergonomic design with a tempered glass overlay, anti-glare treatment and rounded corners.



Full HD 1080p for superior pixel performance

Each Smart Whiteboard features Full HD 1920 x 1080 resolution to deliver superior pixel-by-pixel performance for a more realistic viewing experience. At this resolution you will experience greater image clarity and detail—qualities that will bring high-definition multimedia content to life.

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.

ViewSonic®
See the difference™ 



Normal



Full HD Resolution

Advanced 6-point touch capability for group interaction

With 6-point simultaneous touch technology, this display encourages group interaction allowing two users to simultaneously write or draw on the display's surface using styluses or their fingers – both at the same time!



Touch



ViewBoard software provides tools for effective teaching

This software lets you write, highlight, edit, and transform documents and images on-screen in real-time. It also features screen recording, magnifier, and spotlight features that make office presentations, classroom learning, and distance education more productive, interactive, and efficient.



Energy-saving LED backlight

ViewSonic Smart Whiteboards feature an energy-saving LED backlight with a lifespan of over 30,000 hours—that's more than a decade of durability. This display consumes less power, producing a high ROI and making the CDE7051-TL a great long-term investment by reducing the cost of ownership.


Tough anti-scratch, anti-glare cover

ViewSonic Smart Whiteboards feature 7H hardness scratch-resistant glass covers to ensure durability, as well as a consistent and highly responsive touch experience. The Whiteboards also benefit from an anti-glare film layer which improves on-screen visibility in brighter environments.

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.



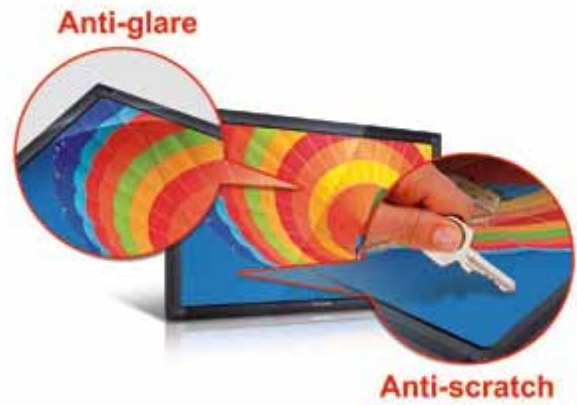

HDMI
HIGH DEFINITION MULTIMEDIA INTERFACE

Versatile input selection for flexible connectivity



With a versatile selection of inputs, our touch display enables you to easily connect and use a variety of digital devices. Additionally, it has an HDMI input that connects to high-definition content sources such as USB, DVI and VGA ports that deliver additional connectivity options.



Large-panel display accessories for improved usability and mobility

The touch display includes 3 styluses for interacting on the display. This large display can be wall mounted for solid and safe user touch experience also having the option of a trolley mount to provide flexibility as a mobile display.

Protective rounded-corner design

A rounded-corner design provides a safer learning environment for active students preventing injuries in the classroom.

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.

ViewSonic
See the difference™



Technical Specifications

LCD	Type	TFT LCD Module with LED Backlight
	Contrast Ratio	4000:1 Typ.
	Viewing Angles	176° Horizontal, 176° Vertical
	Display Area	1538.88 (H) x 865.62 (V) (69.5" diagonal)
	Optimum Resolution	1920 x 1080
	Response Time	6ms
	Aspect Ratio	16:9
	Size	69.5"
	Backlight	LED
	Backlight Life	50,000 Hours Typ.

COMPATIBILITY	Video	S-Video 480i, 576i
	HDMI	480i, 480p, 720p, up to 1080p
	YPbPr	480i, 480p, 720p, up to 1080p
	RGB PC / HDMI PC	Refer to timing table

CONNECTOR	HDMI (input)	x2
	RGB	x2
	Mic In/Out	x1
	PC Audio Input	x2
	CVBS	x1

DIMENSIONS	Physical (WxHxD)	64.9 x 39.3 x 3.8 (inches) / 1649 x 999 x 97 (mm)
	Packaging	70.3 x 44.9 x 10.8 (inches) / 1785x1140x275 (mm)

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.

ViewSonic®
See the difference™ 

REGULATIONS		CE, CCC
PACKAGE CONTENTS		VGA Cable x1 Power Cable x4 Remote Control x1 USB Cable x1 Audio Cable x1 Stylus x3 User Manual CD Wizard x1
WARRANTY		**Warranty offered may differ from market to market
AUDIO	RCA Speakers	x1 15W x2
POWER	Voltage	100-240VAC +/- 10% Wide Range
CONTROLS	Picture Set Up Front Panel Configuration 1 Configuration 2 Sound RS232	Picture Mode, Contrast, Brightness, Color, Tint, Sharpness, Color Temp., Noise Reduction OSD Language, TT Language, Hearing Impaired, PVR File System, Record List, Aspect Ratio, Blue Screen, First Time Installation, Reset, Software Update(USB) POWER, INPUT, PC/VGA, VOL+, VOL-, ZOOM, ENERGY SAVING Time: Clock, Time Zone, Sleep Timer, Auto Standby, OSD Timer Lock: Lock System, Set Password, Block Program, Parental Guidance, Key Lock Sound Mode, Treble, Bass, Balance, Auto Volume, SPDIF MODE, AD Switch x1
VESA® MOUNT		600 x 600
ERGONOMICS	Tilt	None
WEIGHT	Gross Net	187.4 (lb) / 85 (kg) 165.3 (lb) / 75 (kg)
OPERATING CONDITIONS	Humidity Temperature	20% ~ 80% non-condensing 32°F to 104°F (0°C to 40°C)
Video I/O	YPbPr in	x1

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.



Audio I/O	SPDIF out	x1
------------------	-----------	----

Input	USB Type A	x1
	USB Type B (mouse control)	x2

ViewSonic® Limited Warranty

ViewSonic provides customers with the security of a manufacturers warranty against defected products. The type and duration of the applicable warranty service varies by product type, country of purchase and can also vary on an individual basis according to customer requirements agreed at time of purchase. The warranty will expire after the end of the warranty period.

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.

