

Sederhanakan Pekerjaan Anda dengan Hanya Satu Kabel

Raih produktivitas dengan ViewSonic Monitor USB-C. Standar konektivitas baru ini melakukan semuanya untuk anda: dari transfer data berkecepatan tinggi untuk pengisian daya yang nyaman sehingga anda dapat produktif.



Semua yang Anda Butuhkan dalam Satu Kabel

USB-C menghadirkan daya, audio, video, dan transfer data berkecepatan tinggi dalam satu kabel yang ringan dan mengurangi semua kekacauan kabel (VGA, HDMI, DisplayPort).



Pengisian Daya Penuh

Dengan daya lebih dari 60W, isi daya perangkat anda langsung dari monitor anda



Video, Audio, dan Transfer Data

USB-C menggantikan HDMI, VGA, dan DisplayPort menjadi satu, mengurangi semua kekacauan kabel



Konektivitas Berkecepatan Tinggi

Cukup pasang dan langsung nikmati transfer kecepatan tinggi untuk semua tugas anda.



Lihat Manfaat Lebih Lanjut dari Monitor USB-C ViewSonic

Tampilan dalam Resolusi Tinggi

Monitor USB-C canggih memiliki fitur yang menakjubkan, Resolusi 4K (3840 x 2160) atau 2K (2560 x 1440) dengan banyak port yang menawarkan koneksi tambahan untuk DisplayPort dan HDMI. Mewujudkan standar warna tinggi dan detail menakjubkan, monitor ini adalah pilihan sempurna untuk seniman digital, profesional modern, dan master multitasker.

► Produk Rekomendasi



TD2455

24" In-Cell Touch Monitor with USB Type-C Input and Advanced Ergonomics




VP2756-4K

27" 4K UHD Pantone Validated 100% sRGB and Factory Pre-Calibrated Monitor



VG2455

24" Advanced Ergonomics Business Monitor

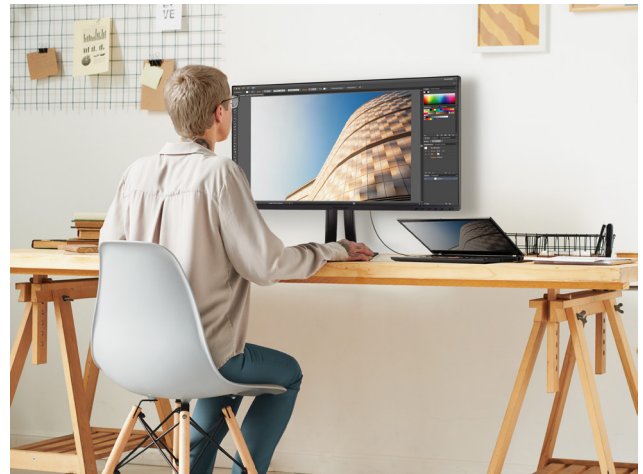

Kecepatan Penuh dengan Docking Terhubung

Monitor docking USB-C ViewSonic adalah hub untuk data, periferal, dan pengisian daya. Menawarkan jaringan ekstra stabil dengan port ethernet bawaan, serta memiliki kemampuan koneksi rantai daisy untuk kemudahan pengaturan meja dengan monitor ganda.

► Produk Rekomendasi



VG2456

24" Docking Monitor featuring USB Type-C and Ethernet



VP2776

ColorPro 27" Pantone Validated Video Editing Monitor with integrated calibrator, DCI-P3, 165Hz & Nano IPS



VP2468a

24" Pantone Validated 100% sRGB Monitor with Docking Station

Produktivitas Di Mana Saja

Bebaskan dirimu dari keterbatasan ruang kerja. Dengan USB-C pengisian daya dua arah, nyalakan monitor portabel dengan laptop anda dan dapatkan kemudahan di dalam perjalanan, pindah dari acara pameran ke pertemuan klien di kafe.

► Produk Rekomendasi



TD1655

16" Touch Portable Monitor



VG1655

16" Business Portable Monitor



VA1655

16" Essential Portable Monitor



Lihat Semua Monitor ViewSonic USB-C



Power Delivery
Audiovisual and Data Transfer
USB-C (DP Alt Mode)
USB 3.2 Hub
Ethernet (RJ45)
Connectivity
Size / Panel Type
Resolution (max.) / Ratio
Brightness (Typ.)
Contrast Ratio (Typ.)
Dynamic Contrast Ratio
Response Time / Refresh Rate
Color Support
3.5mm Audio Out
Speaker
Consumption
ECO Mode (Optimise / Conserve)
Tilt / Swivel / Pivot
Height Adjust (mm)

	TD2455	VG2455
Power Delivery	60W	60W
Audiovisual and Data Transfer	Full	Full
USB-C (DP Alt Mode)	1	1
USB 3.2 Hub	Type A Downstream*2 Type B Upstream*1 Type C Upstream*1	Type A Downstream*3 Type B Upstream*1 Type C Upstream*1
Ethernet (RJ45)	-	-
Connectivity	HDMI 1/4 / DP / DP out	HDMI 1/4 / DP / DP out
Size / Panel Type	24" IPS	24" IPS
Resolution (max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Brightness (Typ.)	250 cd/m ²	250 cd/m ²
Contrast Ratio (Typ.)	1,000:1	800:1
Dynamic Contrast Ratio	50M:1	50M:1
Response Time / Refresh Rate	6ms / 60Hz	5ms / 60Hz
Color Support	8 bit (6 bit + A-FRC)	8 bit (6 bit + FRC)
3.5mm Audio Out	V	-
Speaker	2Watts*2	2Watts*2
Consumption	9.7W / 12.8W	14.4W / 11.9W
ECO Mode (Optimise / Conserve)	17.9W	17.8W
Tilt / Swivel / Pivot	-5° - 60° / 0° / 0°	40° - -5° / 120° / 90°
Height Adjust (mm)	-	130



Power Delivery
Audiovisual and Data Transfer
USB-C (DP Alt Mode)
USB 3.2 Hub
Ethernet (RJ45)
Connectivity
Size / Panel Type
Resolution (max.) / Ratio
Brightness (Typ.)
Contrast Ratio (Typ.)
Dynamic Contrast Ratio
Response Time / Refresh Rate
Color Support
3.5mm Audio Out
Speaker
ECO Mode (Optimise / Conserve)
Consumption
Tilt / Swivel / Pivot
Height Adjust (mm)

	TD1655	VG1655	VA1655
Power Delivery	60W	60W	60W
Audiovisual and Data Transfer	Audiovisual	Audiovisual	Audiovisual
USB-C (DP Alt Mode)	2	2	1
USB 3.2 Hub	-	-	-
Ethernet (RJ45)	-	-	-
Connectivity	Mini HDMI	Mini HDMI	Mini HDMI
Size / Panel Type	16" IPS	16" IPS	16" IPS
Resolution (max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Brightness (Typ.)	250 cd/m ²	250 cd/m ²	250 cd/m ²
Contrast Ratio (Typ.)	800:1	800:1	800:1
Dynamic Contrast Ratio	50M:1	50M:1	50M:1
Response Time / Refresh Rate	6.5ms / 60Hz	6.5ms / 60Hz	7ms / 60Hz
Color Support	6 bit	8 bit (6 bit + FRC)	8 bit (6 bit + FRC)
3.5mm Audio Out	V	V	V
Speaker	0.8Watts*2	0.8Watts*2	0.8Watts*2
ECO Mode (Optimise / Conserve)	6.9W / 6W	7W	7W
Consumption	8W	6W/5.1W	6W/5.1W
Tilt / Swivel / Pivot	20° - 60° / 0° / 0°	20° - 60° / 0° / 0°	30° - 53° / 0° / 0°
Height Adjust (mm)	-	-	-

Lihat Semua Monitor ViewSonic USB-C



	VG2755	VG2456	VP2776
Power Delivery	60W	60W	90W
Audiovisual and Data Transfer	Full	Full	Full
USB-C (DP Alt Mode)	1	1	1
USB 3.2 Hub	USB 3.2 Type A Down Stream*3 USB 3.2 Type B Up Stream*1 USB 3.2 Type C Up Stream*1	Type A Downstream*2 Type B Upstream*1 Type C Upstream*1	Type A Downstream*2 Type C Downstream*1 Type B Upstream*1 Type C Upstream*1 Micro USB*1
Ethernet (RJ45)	-	V	-
Connectivity	VGA / HDMI 1.4	HDMI 1.4 / DP / DP out	HDMI 2.0 / DP
Size / Panel Type	27" IPS	24" IPS	27" IPS
Resolution (max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9	2560 x 1440 / 16:9
Brightness (Typ.)	250 cd/m ²	250 cd/m ²	400 cd/m ²
Contrast Ratio (Typ.)	1,000:1	1,000:1	1,000:1
Dynamic Contrast Ratio	50M:1	50M:1	20M:1
Response Time / Refresh Rate	5ms / 60Hz	5ms / 60Hz	3ms / 165Hz
Color Support	8 bit	8 bit (6 bit + A-FRC)	10 bit (8 bit + A-FRC)
3.5mm Audio Out	-	-	V
Speaker	2Watts*2	2Watts*2	3Watts x2
Consumption	19.1W / 22.54W	13.7W	39.5W
ECO Mode (Optimise / Conserve)	13W / 15.6W	11.68W / 9.95W	36.3W / 33.4W
Tilt / Swivel / Pivot	-5° / 40° / 120° / 90°	40° -5° / 120° / 180°	21° - -3° / 60° / 90°
Height Adjust (mm)	130	130	120



	VP2756-2K	VP2756-4K	VP2468a / VP2768a
Power Delivery	60W	60W	90W
Audiovisual and Data Transfer	Full	Full	Full
USB-C (DP Alt Mode)	1	1	1
USB 3.2 Hub	USB 3.2 Type A Down Stream*2 USB 3.2 Type B Up Stream*1 USB 3.2 Type C Up Stream*1	Type A Downstream*2 Type B Upstream*1 Type C Upstream*1	Type A Downstream*2 Type C Upstream*1
Ethernet (RJ45)	-	-	V
Connectivity	HDMI 1.4	HDMI 2.0 / DP	HDMI 1.4 / DP
Size / Panel Type	27" IPS	27" IPS	24" IPS / 27" IPS
Resolution (max.) / Ratio	2560 x 1440 / 16:9	3840 x 2160 / 16:9	1920 x 1080 / 16:9
Brightness (Typ.)	350 cd/m ²	350 cd/m ²	250 cd/m ²
Contrast Ratio (Typ.)	1,000:1	1,000:1	1,000:1
Dynamic Contrast Ratio	20M:1	20M:1	20M:1
Response Time / Refresh Rate	5ms / 60Hz	5ms / 60Hz	5ms / 60Hz
Color Support	8 bit	10 bit (8 bit + A-FRC)	8 bit (6 bit + A-FRC)
3.5mm Audio Out	-	V	V
Speaker	2Watts x2	2Watts x2	-
Consumption	22.5W / 34W	24W	13.9W
ECO Mode (Optimise / Conserve)	16.5W / 19.3W	21.5W / 19.3W	10.8W / 8.94W
Tilt / Swivel / Pivot	-5° / 21° / 120° / 90°	40° -5° / 120° / 90°	21° - -5° / 130° / 90°
Height Adjust (mm)	130	130	130